


QCPTM (Quick-Connect Plug) Assemblies

At the first signs of corrosion replace the insert, not the entire plug



ABS LECTRACOIL™with QCP™

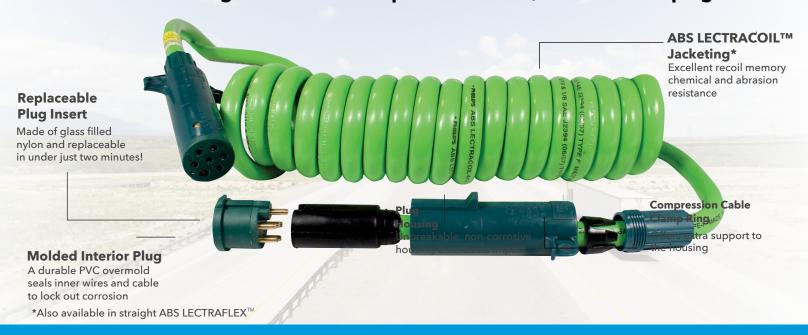

1/8, 2/10 & 4/12 ga.

| 30-9324 | 12', with QCP™ |
|---------|--------------------------|
| 30-9624 | 15', with QCP™ |
| 30-9924 | 15′, 48″ lead, with QCP™ |
| 30-9954 | 20', with QCP™ |

- Recommended for ABS applications
 Flexible from -82°F to 195°F (-63°C to 91°C)
- Excellent recoil memory, chemical and abrasion resistance

ABS PERMACOIL™with QCP™



1/8, 2/10 & 4/12 ga.

| 30-4324 | 12', with QCP™ | |
|---------|--------------------------|--|
| 30-4624 | 15', with QCP™ | |
| 30-4924 | 15', 48" lead, with QCP™ | |

- Recommended for ABS applications
- Flexible from -87°F to 150°F (-66°C to 66°C)
- Good recoil memory, chemical and abrasion resistance

For new and innovative products, visit phillipsind.com





Straight ABS LECTRAFLEX™ with QCP™



| 1/8, 2/10 & 4/12 ga. | | I |
|----------------------|----------------|---|
| 30-2054 | 12', with QCP™ | |
| 30-2074 | 15′, with QCP™ | |
| 30-2094 | 20', with QCP™ | |

- · Chemical and abrasion resistant
- Flexible from -40°F to 150°F (-40°C to 66°C)



For new and innovative products, visit phillipsind.com

5231 California Ave. Ste. # 220 Irvine CA 92617 **800-423-4512**

